

# MDS-G4020シリーズ

20Gポートレイヤ2フルギガビットモジュールマネージド・イーサネット・スイッチ



## 機能と特長

- 汎用性を高める複数のインターフェースタイプの4ポートモジュール
- ツール不要の設計で、スイッチをシャットダウンせずにモジュールを簡単に追加または交換可能
- 超コンパクトなサイズと複数の取り付けオプションにより柔軟な設置が可能
- メンテナンスの手間を最小限に抑えるパッシブバックプレーン
- 過酷な環境での使用に適した頑丈なダイキャスト設計
- さまざまなプラットフォーム間でシームレスなエクスペリエンスを実現する、直感的なHTML5ベースのWebインターフェース

## 認証



## 製品紹介

MDS-G4020シリーズのモジュラー式スイッチは、4つの固定ポート、2つのインターフェースモジュール拡張スロット、および2つの電力モジュールスロットを含む最大20ギガビットポートを提供し、さまざまなアプリケーションで十分な柔軟性を確保します。非常にコンパクトなMDS-G4000シリーズは、進化するネットワーク要件を満たすように設計されており、インストールとメンテナンスが簡単に行えます。また、ホットスワップ可能なモジュール設計を採用しているため、スイッチをシャットダウンしたりネットワーク操作を中断したりすることなく、モジュールを簡単に変更または追加できます。

複数のイーサネットモジュール（RJ45、SFP、PoE）および電源ユニット（24/48 VDC、110/220 VAC/VDC）は、より優れた柔軟性を提供し、異なる動作条件に適合し、イーサネットアグリゲーション/エッジスイッチとして機能するために必要な汎用性と帯域幅を提供する、適応型フルギガビットプラットフォームを提供します。MDS-G4000シリーズスイッチは、限られたスペースに収まるコンパクトな設計、複数の取り付け方法、便利なツール不要のモジュール取り付けを特徴とし、高度なスキルを持つエンジニアを必要とせずに、多用途で簡単な導入を可能にします。MDS-G4000シリーズは、複数の業界認証と非常に耐久性の高いハウジングを備えており、変電所、採掘現場、ITS、石油・ガス用途などの過酷で危険な環境でも確実に動作できます。デュアル電源モジュールのサポートにより、高い信頼性と可用性を実現する冗長性が提供され、LVおよびHV電源モジュールオプションにより、さまざまなアプリケーションの電力要件に対応するための柔軟性がさらに高まります。

さらに、MDS-G4000シリーズはHTML5ベースのユーザーフレンドリーなWebインターフェースを備えており、さまざまなプラットフォームやブラウザで応答性の高いスムーズなユーザーエクスペリエンスを実現します。

## 仕様

### Ethernet Interface

|                       |   |
|-----------------------|---|
| Pre-installed Modules | 4 embedded Gigabit ports                  |
| Module                | 4 slots for optional 4-port FE/GE modules |

|                  |  |
|------------------|--|
| Slot Combination | <p>See the LM-7000H module series datasheet for more information.</p> <p>Note: The required power module depends on the choice of LM-7000H module. Refer to the following power/module combination requirements.</p> <p>LM-7000H non-PoE modules:<br/>Any power module</p> <p>LM-7000H PoE modules:<br/>PWR-HV-P48, PWR-LV-P48 only</p>  |
| Standards        | <p>IEEE 802.3 for 10BaseT<br/>IEEE 802.3u for 100BaseT(X) and 100BaseFX<br/>IEEE 802.3ab for 1000BaseT(X)<br/>IEEE 802.3z for 1000BaseX<br/>IEEE 802.3x for flow control<br/>IEEE 802.3ad for Port Trunk with LACP<br/>IEEE 802.1Q for VLAN Tagging<br/>IEEE 802.1D-2004 for Spanning Tree Protocol<br/>IEEE 802.1w for Rapid Spanning Tree Protocol<br/>IEEE 802.1p for Class of Service<br/>IEEE 802.1X for authentication</p> |

### Ethernet Software Features

|                      |   |
|----------------------|---|
| Management           | <p>IPv4/IPv6<br/>Flow control<br/>Back Pressure Flow Control<br/>DHCP Server/Client<br/>ARP<br/>RARP<br/>DHCP Relay Agent (Option 82)<br/>Fiber check<br/>Port Mirroring (SPAN, RSPAN)<br/>Linkup Delay<br/>LLDP<br/>SMTP<br/>SNMP Trap<br/>SNMP Inform<br/>SNMPv1/v2c/v3<br/>RMON<br/>TFTP<br/>SFTP<br/>HTTP<br/>HTTPS<br/>Telnet<br/>Syslog<br/>Private MIB</p> |
| Filter               | <p>GMRP<br/>GVRP<br/>GARP<br/>802.1Q VLAN<br/>IGMP Snooping v1/v2/v3<br/>IGMP Querier</p>   |
| Redundancy Protocols | <p>STP<br/>RSTP<br/>Turbo Ring v2<br/>Turbo Chain<br/>Ring Coupling<br/>Dual-Homing<br/>Link Aggregation<br/>MRP<br/>MSTP<br/>Network Loop Protection</p>   |
| Security             | <p>Access control list<br/>Broadcast storm protection<br/>DHCP Snooping<br/>Dynamic ARP Inspection<br/>IP Source Guard<br/>Rate Limit</p>   |

|                          |   |
|--------------------------|---|
|                          | Trust access control<br>MAC authentication bypass<br>MAC Sticky<br>Static Port Lock<br>HTTPS/SSL<br>SSH<br>RADIUS<br>TACACS+<br>Login and Password Policy   |
| Time Management          | SNTP<br>NTP Server/Client<br>NTP Authentication   |
| Protocols                | IPv4/IPv6<br>TCP/IP<br>UDP<br>ICMP<br>ARP<br>RARP<br>TFTP<br>DNS<br>NTP Client<br>DHCP Server<br>DHCP Client<br>802.1X<br>QoS<br>HTTPS<br>HTTP<br>Telnet<br>SMTP<br>SNMPv1/v2c/v3<br>RMON<br>Syslog |
| Industrial Protocols     | EtherNet/IP<br>Modbus TCP   |
| MIB                      | P-BRIDGE MIB<br>Q-BRIDGE MIB<br>IEEE8021-SPANNING-TREE-MIB<br>IEEE8021-PAE-MIB<br>IEEE8023-LAG-MIB<br>LLDP-EXT-DOT1-MIB<br>LLDP-EXT-DOT3-MIB<br>SNMPv2-MIB<br>RMON MIB Groups 1, 2, 3, 9            |
| Power Substation         | MMS   |
| <b>Switch Properties</b> |   |
| MAC Table Size           | 16 K  |
| Max. No. of VLANs        | 256   |
| VLAN ID Range            | VID 1 to 4094   |
| IGMP Groups              | 1024  |
| Jumbo Frame Size         | 9.216 KB  |
| Priority Queues          | 8   |
| Packet Buffer Size       | 12 Mbits  |
| <b>LED Interface</b>     |   |
| LED Indicators           | PWR, EPS, STATE, SYNC, FAULT, MSTR/HEAD, CPLR/TAIL  |

## Serial Interface

|              |               |
|--------------|---------------|
| Console Port | RS-232 (RJ45) |
|--------------|---------------|

## USB Interface

|               |            |
|---------------|------------|
| USB Connector | USB Type A |
|---------------|------------|

## Input/Output Interface

|                        |   |
|------------------------|---|
| Digital Input Channels | 1 (On MGMT Module)  |
| Digital Inputs         | +13 to +30 V for state 1<br>-30 to +3 V for state 0<br>Max. input current: 8 mA               |
| Alarm Contact Channels | 3 (On MGMT, PWR1, PWR2 Module)<br>Relay output with current carrying capacity of 2 A @ 30 VDC |
| Buttons                | Reset button  |

## Power Parameters

|                          |  |
|--------------------------|--|
| Input Voltage            | With PWR-HV-P48 installed:<br>110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz, PoE: 48 VDC<br><br>With PWR-LV-P48 installed:<br>24/48 VDC, PoE: 48 VDC<br><br>With PWR-HV-NP installed:<br>110/220 VDC, 110 VAC, 60 HZ, 220 VAC, 50 Hz<br><br>With PWR-LV-NP installed:<br>24/48 VDC   |
| Operating Voltage        | With PWR-HV-P48 installed:<br>88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz, PoE: 46 to 57 VDC<br><br>With PWR-LV-P48 installed:<br>18 to 72 VDC (24/48 VDC for hazardous location), PoE: 46 to 57 VDC (48 VDC for hazardous location)<br><br>With PWR-HV-NP installed:<br>88 to 300 VDC, 90 to 264 VAC, 47 to 63 Hz<br><br>With PWR-LV-NP installed:<br>18 to 72 VDC                                      |
| Input Current            | With PWR-HV-P48/PWR-HV-NP installed:<br>Max. 0.30 A @ 110 VDC<br>Max. 0.15 A @ 220 VDC<br>Max. 0.60 A @ 110 VAC<br>Max. 0.40 A @ 220 VAC<br><br>With PWR-LV-P48/PWR-LV-NP installed:<br>Max. 1.5 A @ 24 VDC<br>Max. 0.75 A @ 48 VDC<br><br>EPS (PoE models only):<br>Max. 8.2 A @ 48 VDC<br><br>Note: These are the input current ratings for the device with the maximum number of modules installed. |
| Power Consumption (Max.) | With PWR-HV-P48/PWR-HV-NP installed:<br>Max. 33.0 W @ 110 VDC<br>Max. 34.0 W @ 220 VDC<br>Max. 35.8 W @ 110 VAC<br>Max. 38.0 W @ 220 VAC<br><br>With PWR-LV-P48/PWR-LV-NP installed:<br>Max. 36.0 W @ 24 VDC<br>Max. 36.0 W @ 48 VDC   |

|                                |   |
|--------------------------------|---|
|                                | Note: These are the maximum power consumption ratings for the device with the maximum number of modules installed.  |
| Max. PoE Power Output per Port | 36 W  |
| Total PoE Power Budget         | <p>Max. 360 W (with one power supply) for total PD consumption at 48 VDC input for PoE systems</p> <p>Max. 360 W (with one power supply) for total PD consumption at 53 to 57 VDC input for PoE+ systems</p> <p>Max. 720 W (with two power supplies) for total PD consumption at 48 VDC input for PoE systems</p> <p>Max. 720 W (with two power supplies) for total PD consumption at 53 to 57 VDC input for PoE+ systems</p> |
| Overload Current Protection    | Supported   |
| Reverse Polarity Protection    | Supported   |

### Physical Characteristics

|              |  |
|--------------|--|
| IP Rating    | IP40   |
| Dimensions   | 176 x 115 x 163.25 mm (6.93 x 4.53 x 6.44 in)  |
| Weight       | 2500 g (5.51 lb)   |
| Installation | <p>DIN-rail mounting</p> <p>Wall mounting (with optional kit)</p> <p>Rack mounting (with optional kit)</p> |

### Environmental Limits

|  |  |
|--|--|
| Operating Temperature                  | <p>Standard Temperature: -10 to 60°C (14 to 140°F)</p> <p>Wide Temperature: -40 to 75°C (-40 to 167°F)</p> |
| Storage Temperature (package included) | -40 to 85°C (-40 to 185°F)   |
| Ambient Relative Humidity              | 5 to 95% (non-condensing)  |

### Standards and Certifications

|                 |   |
|-----------------|---|
| Safety          | <p>EN IEC 62368-1</p> <p>IEC 60950-1</p> <p>IEC 62368-1</p> <p>UL 62368-1</p>   |
| EMC             | <p>EN 55032/35</p> <p>EN 61000-6-2/-6-4</p>   |
| EMI             | CISPR 32, FCC Part 15B Class A  |
| EMS             | <p>IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV</p> <p>IEC 61000-4-3 RS: 80 MHz to 1 GHz: 20 V/m</p> <p>IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV</p> <p>IEC 61000-4-5 Surge: Power: 4 kV; Signal: 4 kV</p> <p>IEC 61000-4-6 CS: 10 V</p> <p>IEC 61000-4-8 PFMF</p> <p>IEC 61000-4-11 Voltage Dips &amp; Interruptions</p> |
| Railway         | EN 50121-4  |
| Traffic Control | NEMA TS2  |
| Shock           | IEC 60068-2-27  |
| Freefall        | IEC 60068-2-31  |

|                     |                            |
|---------------------|----------------------------|
| Vibration           | IEC 60068-2-6              |
| Hazardous Locations | ATEX<br>Class I Division 2 |
| Power Substation    | IEEE 1613<br>IEC 61850-3   |

### MTBF

|           |                 |
|-----------|-----------------|
| Time      | 1,007,790 hrs   |
| Standards | Telcordia SR332 |

### Warranty


|                 |  |
|-----------------|--|
| Warranty Period | 5 years  |
| Details         | See <a href="http://www.moxa.com/jp/warranty">www.moxa.com/jp/warranty</a> |

### Package Contents

|                  |   |
|------------------|---|
| Device           | 1 x MDS-G4020 Series switch   |
| Installation Kit | Pre-install 2 x DIN-rail kit<br>2 x cap, plastic, for RJ45 port   |
| Documentation    | 1 x quick installation guide<br>1 x product notice, Simplified Chinese<br>1 x product certificates of quality inspection, Simplified Chinese<br>1 x warranty card |
| Note             | This product requires additional modules (sold separately) to function.   |

## 寸法

単位: mm (インチ)

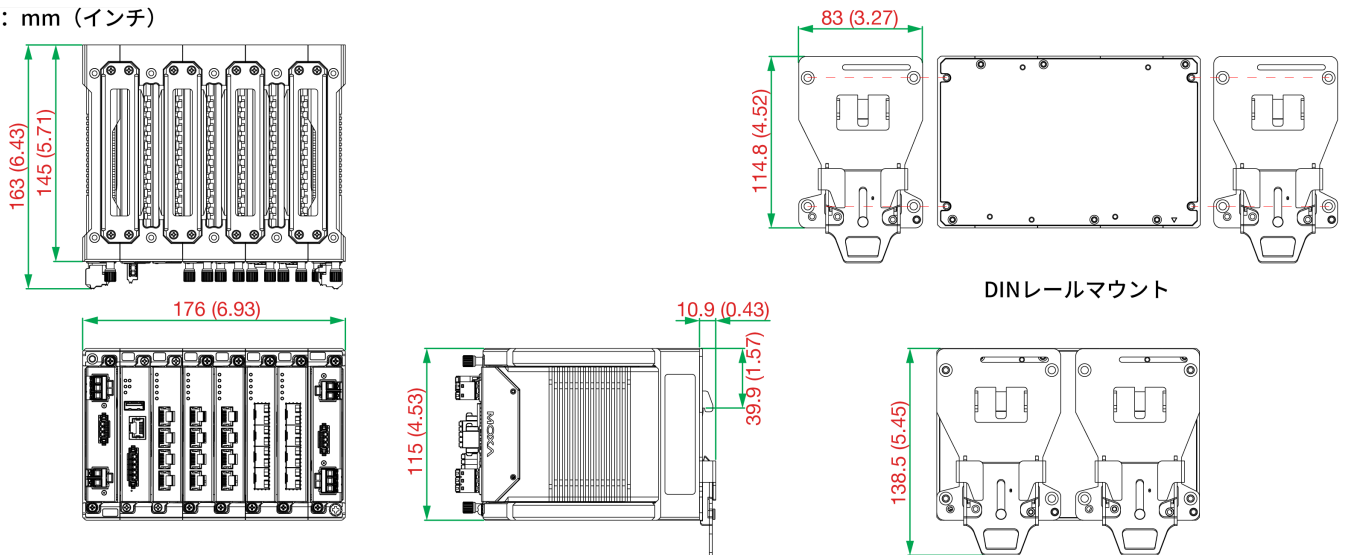

## 注文情報

| Model Name  | Layer | Total No. of Ports | 100/1000Base SFP Slots | 10/100/1000BaseT(X) Ports RJ45 Connector | PoE 10/100/1000BaseT(X) Ports RJ45 Connector | 10/100BaseT(X) Ports RJ45 Connector | PoE 10/100BaseT(X) Ports RJ45 Connector | Operating Temp. |
|-------------|-------|--------------------|------------------------|--|--|-------------------------------------|---|-----------------|
| MDS-G4020   | 2     | 20                 | Up to 16               | Up to 20                                 | Up to 16                                     | Up to 16                            | Up to 16                                | -10 to 60°C     |
| MDS-G4020-T | 2     | 20                 | Up to 16               | Up to 20                                 | Up to 16                                     | Up to 16                            | Up to 16                                | -40 to 75°C     |

## アクセサリ（別売）

### LM-7000H Module Series

|                |   |
|----------------|---|
| LM-7000H-4GTX  | Gigabit Ethernet module with 4 10/100/1000BaseT(X) ports                      |
| LM-7000H-4GPoE | Gigabit Ethernet module with 4 10/100/1000BaseT(X) IEEE 802.3af/at PoE+ ports |
| LM-7000H-4GSFP | Gigabit Ethernet module with 4 100/1000BaseSFP slots                          |
| LM-7000H-4TX   | Fast Ethernet module with 4 10/100BaseT(X) ports                              |
| LM-7000H-4PoE  | Fast Ethernet module with 4 10/100BaseT(X) IEEE 802.3af/at PoE+ ports         |

### Power Modules

|            |   |
|------------|---|
| PWR-LV-P48 | Power supply module (24/48 VDC) with system power input, relay, PoE power input       |
| PWR-HV-P48 | Power supply module (110/220 VAC/VDC) with system power input, relay, PoE power input |
| PWR-LV-NP  | Power supply module (24/48 VDC) with system power input, relay                        |
| PWR-HV-NP  | Power supply module (110/220 VAC/VDC) with system power input, relay                  |

### Wall-Mounting Kits

|           |                                       |
|-----------|---------------------------------------|
| WK-112-01 | Wall-mounting kit, 2 plates, 8 screws |
|-----------|---------------------------------------|

### Rack-Mounting Kits

|          |  |
|----------|--|
| RK-3U-02 | Rack-mounting kit with 4 L-shaped plates for the MDS-G4000 and MDS-G4000-4XGS Series |
|----------|--|

### SFP Modules

|               |  |
|---------------|--|
| SFP-1FEMLC-T  | SFP module with 1 100Base multi-mode, LC connector for 2/4 km transmission, -40 to 85°C operating temperature  |
| SFP-1FESLC-T  | SFP module with 1 100Base single-mode with LC connector for 40 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1FELLC-T  | SFP module with 1 100Base single-mode with LC connector for 80 km transmission, -40 to 85°C operating temperature                                      |
| SFP-1G10ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G10ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G10BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G10BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 10 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G20ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G20ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G20BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G20BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 20 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |
| SFP-1G40ALC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, 0 to 60°C operating temperature   |
| SFP-1G40ALC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1310 nm, RX 1550 nm, -40 to 85°C operating temperature |
| SFP-1G40BLC   | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, 0 to 60°C operating temperature   |
| SFP-1G40BLC-T | WDM-type (BiDi) SFP module with 1 1000BaseSFP port with LC connector for 40 km transmission; TX 1550 nm, RX 1310 nm, -40 to 85°C operating temperature |

|                |   |
|----------------|---|
| SFP-1GSXLC     | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, 0 to 60°C operating temperature   |
| SFP-1GSXLC-T   | SFP module with 1 1000BaseSX port with LC connector for 300m/550m transmission, -40 to 85°C operating temperature |
| SFP-1GLSXLC    | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, 0 to 60°C operating temperature    |
| SFP-1GLSXLC-T  | SFP module with 1 1000BaseLSX port with LC connector for 1km/2km transmission, -40 to 85°C operating temperature  |
| SFP-1GLXLC     | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLXLC-T   | SFP module with 1 1000BaseLX port with LC connector for 10 km transmission, -40 to 85°C operating temperature     |
| SFP-1GLHLC     | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, 0 to 60°C operating temperature       |
| SFP-1GLHLC-T   | SFP module with 1 1000BaseLH port with LC connector for 30 km transmission, -40 to 85°C operating temperature     |
| SFP-1GLHXC     | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, 0 to 60°C operating temperature      |
| SFP-1GLHXC-T   | SFP module with 1 1000BaseLHX port with LC connector for 40 km transmission, -40 to 85°C operating temperature    |
| SFP-1GZXLC     | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, 0 to 60°C operating temperature       |
| SFP-1GZXLC-T   | SFP module with 1 1000BaseZX port with LC connector for 80 km transmission, -40 to 85°C operating temperature     |
| SFP-1GEZXC     | SFP module with 1 1000BaseEZX port with LC connector for 110 km transmission, 0 to 60°C operating temperature     |
| SFP-1GEZXC-120 | SFP module with 1 1000BaseEZX port with LC connector for 120 km transmission, 0 to 60°C operating temperature     |
| SFP-1GTXRJ45-T | SFP module with 1 1000BaseT port with RJ45 connector for 100 m transmission, -40 to 75°C operating temperature    |

### Power Supplies

|            |  |
|------------|--|
| HDR-60-24  | 60 W/2.5 A DIN-rail 24 VDC power supply, universal 85 to 264 VAC or 120 to 370 VDC input voltage, -30 to 70°C operating temperature  |
| NDR-120-24 | 120 W/5.0 A DIN-rail 24 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-120-48 | 120 W/2.5 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |
| NDR-240-48 | 240 W/5.0 A DIN-rail 48 VDC power supply, universal 90 to 264 VAC or 127 to 370 VDC input voltage, -20 to 70°C operating temperature |

### Cables

|         |  |
|---------|--|
| CN20070 | 10-pin RJ45 to DB9 female serial cable |
|---------|--|

### Storage Kits

|              |   |
|--------------|---|
| ABC-02-USB   | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, 0 to 60°C operating temperature   |
| ABC-02-USB-T | Configuration backup and restoration tool, firmware upgrade, and log file storage tool for managed Ethernet switches and routers, -40 to 75°C operating temperature |

### Software

|            |                              |
|------------|------------------------------|
| MXview-50  | MXview license for 50 nodes  |
| MXview-100 | MXview license for 100 nodes |
| MXview-250 | MXview license for 250 nodes |
| MXview-500 | MXview license for 500 nodes |



|                   |                                       |
|-------------------|---------------------------------------|
| MXview-1000       | MXview license for 1000 nodes         |
| MXview-2000       | MXview license for 2000 nodes         |
| MXview Upgrade-50 | MXview license expansion for 50 nodes |

© Moxa Inc. All rights reserved.2024年6月5日更新。

Moxa Inc.の明白な許可を written で取得しない限り、本書およびその一部の複製や使用はいかなる方法やいかなる場合でも許可されません。製品の仕様は予告なく変更されることがあります。最新の製品情報については当社のWebサイトをご覧ください。