# **LNA-1000 Series**

## Industrial Cellular Low-noise Amplifiers



#### **Features and Benefits**

- · Industrial-grade signal amplifier for 5G networks
- · Compact size for easy installation
- · Easy integration with Moxa 5G user equipment
- Stabilizes and improves low-power 5G signal performance
- -40 to 70°C wide-temperature design

## Introduction

The LNA-1000 Series low-noise amplifier modules are designed to amplify the performance and sensitivity of weak signals while minimizing the introduction of additional noise. The LNA-1000 Series modules are suitable for a wide variety of communications and signal processing applications.

The LNA module employs advanced circuitry to achieve high gain and low noise. These modules operate in the radio frequency (RF) range and can amplify weak signals from antennas, or other sources with minimal distortion.

## **Specifications**

#### Cellular Interface

Cellular Antenna Connectors	2 x SMA(J) signal input (including one power input) 2 x SMA(J) signal output		
Frequency Bands Supported	Cellular broadband LTE and NR frequencies		
LED Indicators			
System	Power		
Power Parameters			
Source of Input Power	Powered by 5G user equipment (UE) via RF cable		
Physical Characteristics			
Dimensions	75.4 x 60.4 x 15.5 mm (2.97 x 2.38 x 0.61 in)		
Housing	Metal		
IP Rating	IP30		
Weight	73 g (0.16 lb)		
Installation	Wall mounting		



#### **Environmental Limits**

Operating Temperature	-40 to 70°C (-40 to 158°F)
Storage Temperature	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

#### **MTBF**

Time	14,090,649 hrs
Standards	Telcordia SR332

#### Warranty


Warranty Period	5 years
Details	See www.moxa.com/warranty


## **Package Contents**

Device	1 x LNA-1000 Series low-noise amplifier	
Documentation	1 x quick installation guide	

## **Dimensions**

Unit: mm (inch)



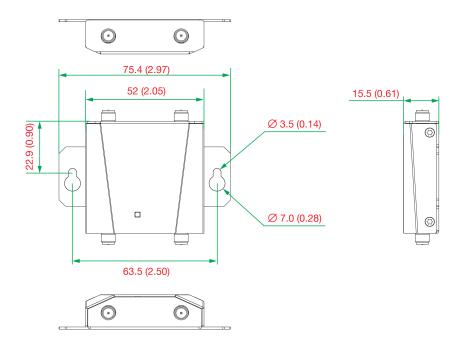

# **Ordering Information**

Model Name	Supported Devices	Cellular Bands	Housing	Operating Temp.
LNA-1120-T	CCG-1500 Series	Cellular broadband LTE and NR frequencies	IP30	-40 to 70°C

© Moxa Inc. All rights reserved. Updated Dec 26, 2023.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

