

TCC-100/100I 系列

工業級 RS-232 轉 RS-422/485 轉換器，附選購的 2 kV 隔離



特色與優點

- RS-232 轉 RS-422 轉換，並提供 RTS/CTS 支援
- RS-232 轉 2 線或 4 線 RS-485 轉換
- 2 kV 隔離保護 (TCC-100I)
- 壁掛和 DIN 導軌安裝
- 插拔式接線端子模組，可輕易完成 RS-422/485 佈線
- LED 指示燈 (電源、Tx、Rx)
- 適用於 -40 至 85°C 環境之寬溫模組

認證



簡介

RS-232 轉 RS-422/485 轉換器的 TCC-100/100I 系列藉由延長 RS-232 傳輸距離，進而增加聯網功能。兩種轉換器均有卓越的工業級設計，包括 DIN 導軌安裝、接線端子模組線路、外接電源接線端子模組，以及光學隔離 (僅 TCC-100I 和 TCC-100I-T)。TCC-100/100I 系列轉換器是在關鍵工業環境中將 RS-232 訊號轉換為 RS-422/485 的理想解決方案。

規格

Serial Interface

Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)
Connector	Terminal block
Isolation	TCC-100I/100I-T: 2 kV (-I model)
No. of Ports	2
Pull High/Low Resistor for RS-485	1 kilo-ohm, 150 kilo-ohms
RS-485 Data Direction Control	ADDC® (automatic data direction control)
Serial Standards	RS-232, RS-422, RS-485
Terminator for RS-485	N/A, 120 ohms, 120 kilo-ohms

Serial Signals

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND

Power Parameters

Input Current	TCC-100/100-T: 50 to 85 mA @ 12 to 48 VDC TCC-100/100I-T: 150 mA @ 12 to 48 VDC
Input Voltage	12 to 48 VDC
No. of Power Inputs	1
Overload Current Protection	Supported
Power Connector	Terminal block (for DC models)
Power Consumption	TCC-100/100-T: 50 to 85 mA @ 12 to 48 VDC TCC-100/100I-T: 150 mA @ 12 to 48 VDC

Physical Characteristics

Housing	Metal
Dimensions	67 x 100.4 x 22 mm (2.64 x 3.93 x 0.87 in)
IP Rating	IP30
Weight	148 g (0.33 lb)
Installation	DIN-rail mounting (with optional kit), Wall mounting

Environmental Limits

Operating Temperature	Standard Models: -20 to 60°C (-4 to 140°F) Wide Temp. Models: -40 to 85°C (-40 to 185°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF
Environmental Testing	IEC 60068-2-1 IEC 60068-2-2 IEC 60068-2-3
Safety	EN 60950-1, IEC 60950-1
Vibration	IEC 60068-2-6

MTBF

Time	3,017,857 hrs
Standards	Telcordia (Bellcore), GB

Warranty


Warranty Period	5 years
Details	See www.moxa.com/tw/warranty

Package Contents

Device	1 x TCC-100/100I Series converter
Installation Kit	1 x DIN-rail kit 1 x rubber stand
Cable	1 x terminal block to power jack converter
Documentation	1 x quick installation guide 1 x warranty card

尺寸

單位：公釐 (英吋)

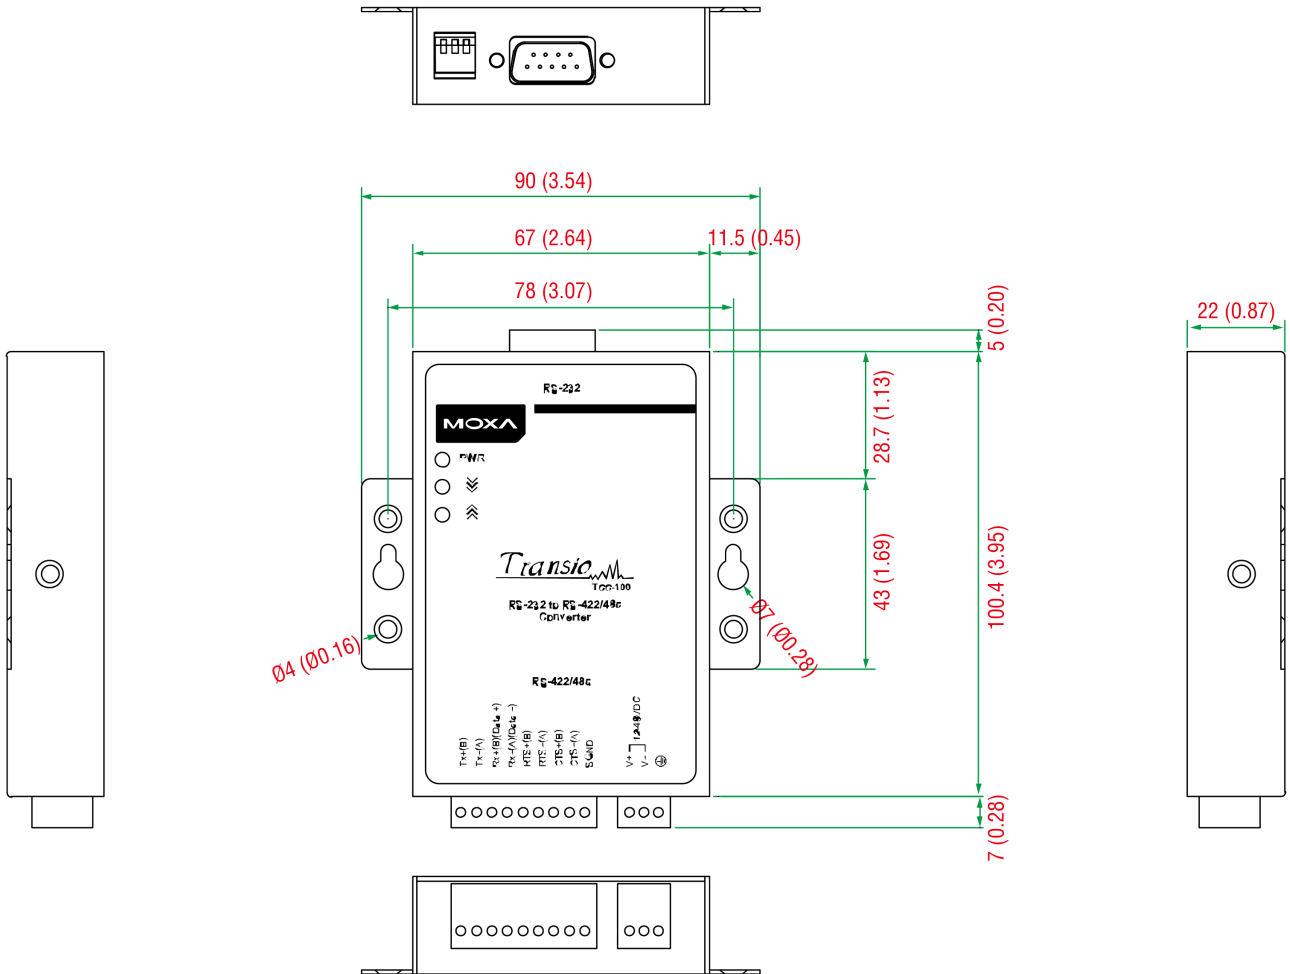

訂購資訊

Model Name	Isolation	Operating Temp.
TCC-100	-	-20 to 60°C
TCC-100-T	-	-40 to 85°C
TCC-100I	P	-20 to 60°C
TCC-100I-T	P	-40 to 85°C

配件 (選購)

DIN-Rail Mounting Kits

DK35A

DIN-rail mounting kit, 35 mm

Power Cords

CBL-PJTB-10

Non-locking barrel plug to bare-wire cable

© Moxa Inc. 版權所有.2020 年 4 月 14 日更新。

未經 Moxa Inc. 明確書面許可，不得以任何方式複製或使用本文件及其任何部分。產品規格如有變更，恕不另行通知。請至本公司官網了解最新的產品資訊。